

Silly Machine — Technical Rider Overview

Tech rider version: 2025-12-17

Artist & Show Info


Artist/Band Name	Silly Machine
Total Members (Qty)	5
Show Duration	2 Hours
Setup Duration	15 Minutes

Technical Contacts

FOH Engineer
Monitor Engineer
Manager

Stage Plot

Overall layout of band positions and key equipment on stage.

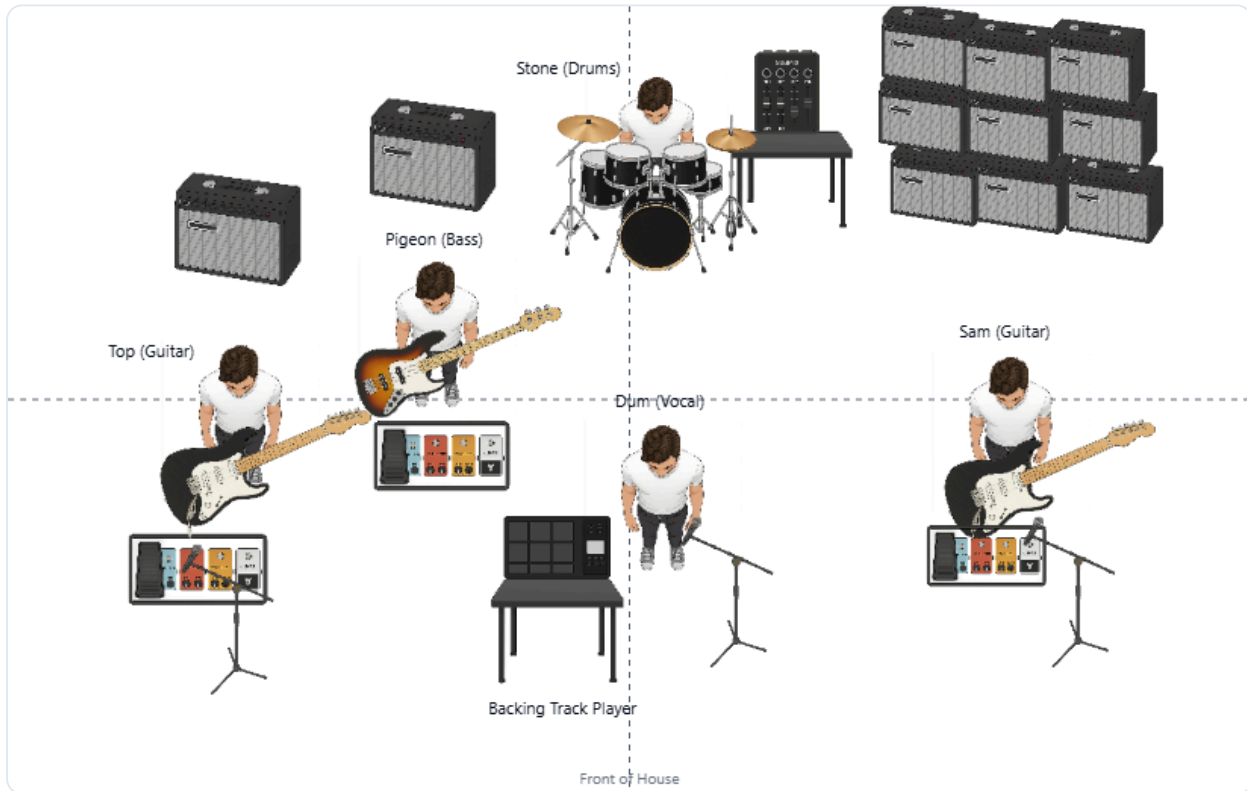

Band Members

NAME	ROLE	MONITOR NEED	MIC / DI NEEDED	NOTES
Dum	Vocal	Wedge	-	
Top	Guitar	Wedge	-	
Sam	Guitar	IEM Mono	-	
Pigeon	Bass	IEM Mono	-	
Stone	Drums	IEM Mono	-	

Backline Requirements

BACKLINE FOR DUM

EQUIPMENT	PROVIDED BY	QTY	NOTES
Mic Stand	Venue	1	Preference: Shure Beta 58A with boom stand
AC 220V / 50Hz Power	Venue	1	
Table / Note stand for playback device	Venue	1	

BACKLINE FOR TOP

EQUIPMENT	PROVIDED BY	QTY	NOTES
Guitar Amp	Venue	1	with FX loop (send/return)
Guitar Stand	Venue	1	Preference: Hercules GS412B or equivalent
AC 220V / 50Hz Power	Venue	1	
Vocal Mic with Stand	Venue	1	

BACKLINE FOR SAM

EQUIPMENT	PROVIDED BY	QTY	NOTES
Guitar Amp	Venue	1	Fender / Marshall
Guitar Stand	Venue	1	Preference: Hercules GS412B or equivalent
Wireless IEM Set	Venue	1	
AC 220V / 50Hz Power	Venue	1	
Vocal Mic with Stand	Venue	1	

BACKLINE FOR PIGEON

EQUIPMENT	PROVIDED BY	QTY	NOTES
Guitar/Bass Stand	Venue	1	Preference: Hercules GS412B or equivalent
Wireless IEM Set	Venue	1	
AC 220V / 50Hz Power	Venue	1	

BACKLINE FOR STONE

EQUIPMENT	PROVIDED BY	QTY	NOTES
Drum Set (5pc)	Venue	1	Preference brand: quality maple kit (e.g. Tama Starclassic or equivalent)
Hi-Hat Stand	Venue	1	
Cymbal Stands	Venue	3	
Snare Stand	Venue	1	
Drum Throne	Venue	1	
AC 220V / 50Hz Power	Venue	2	
Kick Pedal	Band	1	
Cymbals Set	Band	1	

Power Requirements Summary

Voltage Requirement	220V
Grounding Requirement	Safely grounded
Required Power Outlets (Qty)	5